SURFACE PROTECT./OBERFL.SCHUTZ	
I	JED-260
II	JED-256-1

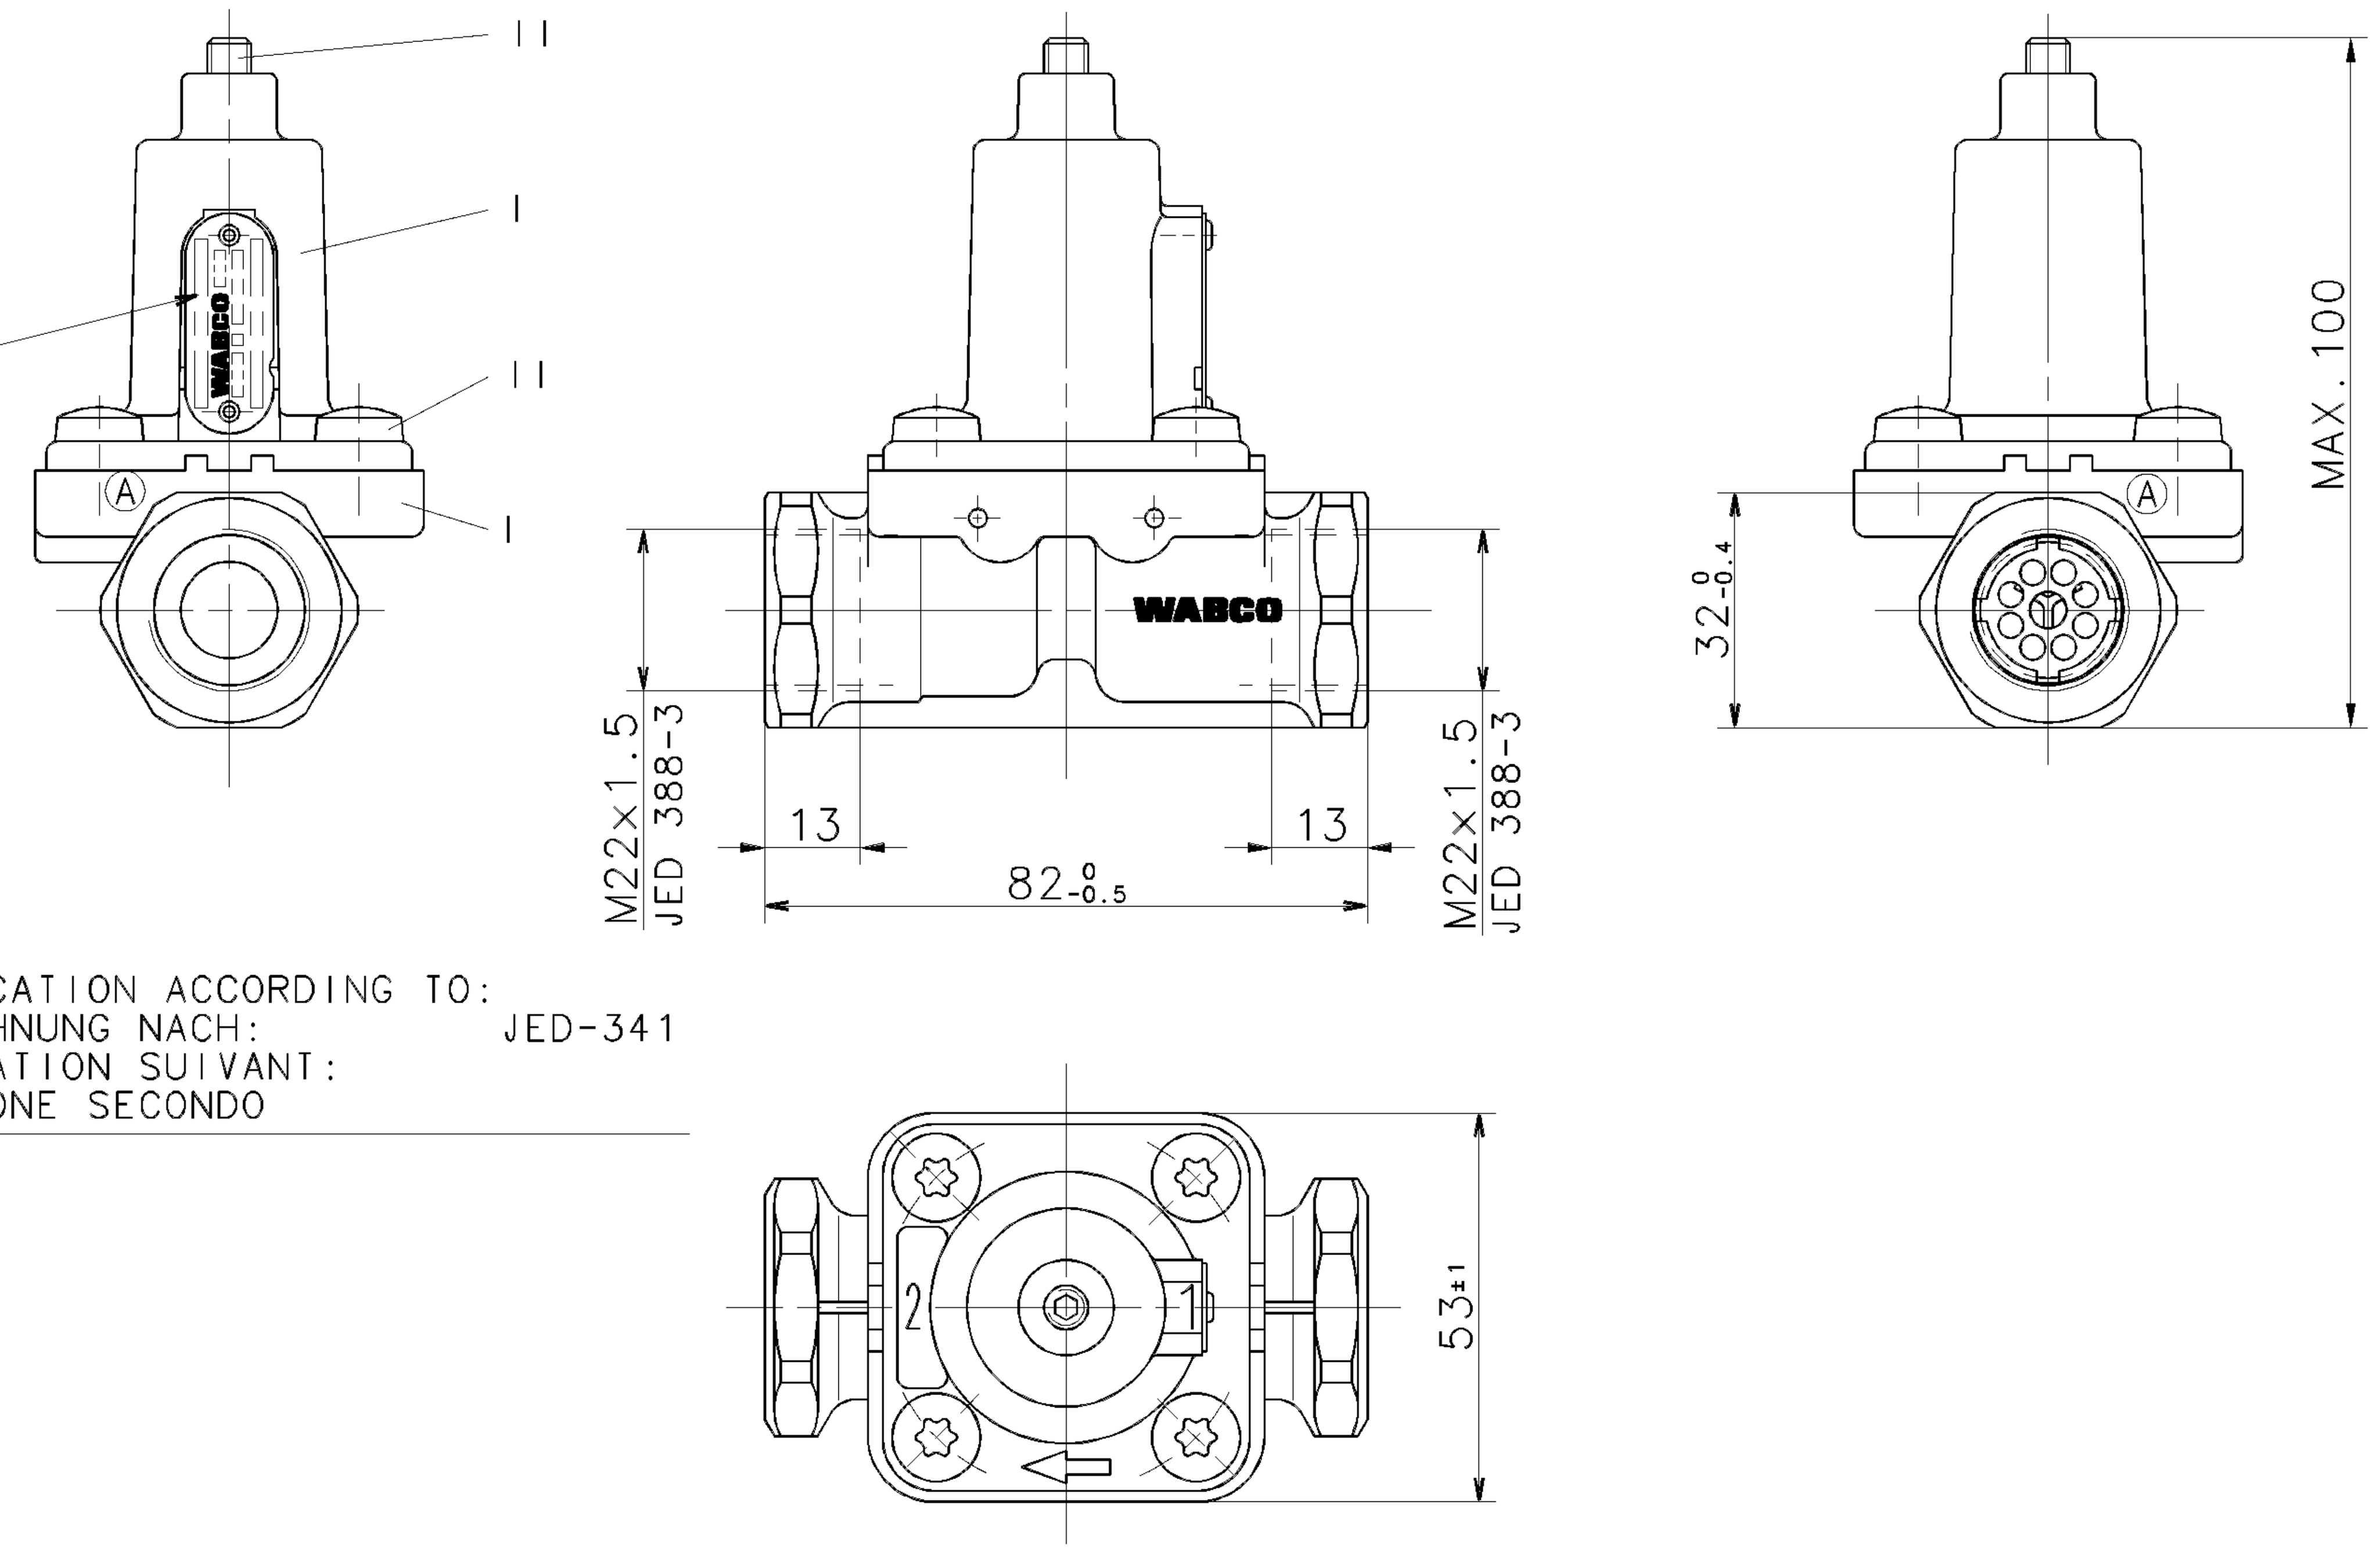

IDENTIFICATION ACCORDING TO:
KENNZEICHNUNG NACH: JED-341
IDENTFICATION SUIVANT:
INDICAZIONE SECONDO

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M22x1.5: $M_{max.}$ = 53 Nm
COUPLE DE SERRAGE DES RACCORDS: JED 388-3
COPPIA DI SERRAGGIO DEI RACCORDI:

1 SUPPLY
ENERGIEZUFLUSS
ALIMENTATION
ALIMENTAZIONE

2 DELIVERY
ENERGIEABFLUSS
UTILISATION
MANDATA

WORKING PRESSURE:
BETRIEBSDRUCK: MAX. p_e = 13 bar
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH: -40°C...+80°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

NOMINAL DIAMETER:
NENNWEITE: Ø8mm = 50mm^2
DIAMETRE NOMINAL:
DIAMETRO NOMINALE:

CHARGING PRESSURE: SEE TABLE
UEBERSTROEMDRUCK: SIEHE TABELLE
PRESSION DE BARRAGE: VOIR TABLEAU
PRESSIONE DI PRESA: VEDERE TABELLA

WITHOUT RETURN FLOW
OHNE RURCKSTROEMUNG
SANS RETOUR
SENZA RITORNO



DEVICE NUMBER GERAETE-NUMMER NUMERO D' APPAREIL NUMERO CODICE DELL APPARECCHIO	CUSTOMERS NO. KUNDEN-NR. NO. CLIENT CLIENTE	ZGS	CAD	CHARGING PRESSURE UEBERSTROEMDRUCK PRESSION DE BARRAGE PRESSIONE DI PRESA p_e =(bar) (p_2 =0bar)
434 100 153 0				$7.3^{0}_{-0.3}$
WABCO				

GENERAL SPECIFICATION: JED-334						
FURTHER TECHNICAL DATA:						
DOC. CODE:	SHEET: TO					
GENERAL TOLERANCES						
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm) ≤50	> 50 ≤180	>180 ≤400	>400	∢
FINE		0,5	1,0	1,5	2,0	
MEDIUM	X	1,0	2,0	3,0	4,0	± 3°
COARSE		2,0	3,5	5,0	6,5	
~~TAPPED HOLES ACC. ISO 4039 / JED-152~~						
1) TOLERANCE CLASS APPLIED CROSSMARKED						

DCN-NO.	REV.	DATE
091932	3xA	04-09-24

CADAM-DRAWING COPYRIGHT		WABCO
DATE	SIGNATURE	
DRAWN: 03-12-15	REMSKI	CHARGING VALVE UEBERSTROEMVENTIL VALVE DE BARRAGE VALVOLA DI PRESA D'ARIA
CHECKED: 03-12-15	GRZYBOWSKI	
STANDARDIZATION:		

MASS	SCALE	PRODUCT IDENTIFICATION NO.	DOC. CODE	SHEET
0.450 KG	1:1	434 100 198 0	653	1/1
SIZE	T.R.I.		SHAPE CODE	REPLACEMENT FOR
A 1	510 (A)			

100mm

EXPERT CODE 8 1 8 (A) PRODUCT TYPE 0 0 X

1G09/016/3/04.93

605/653