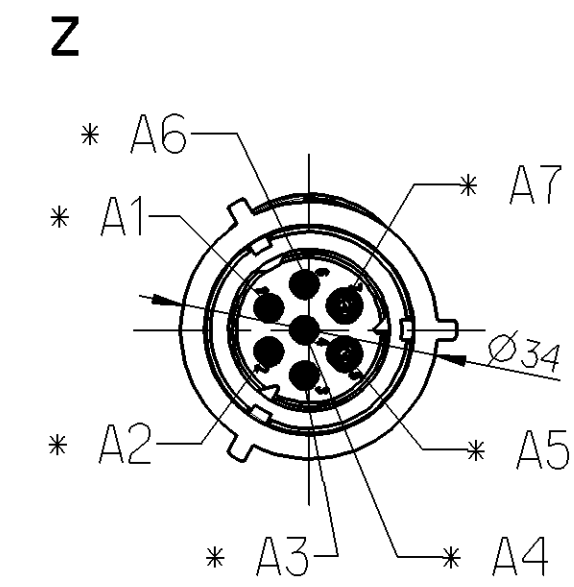


MOUNTET CABLE RESISTANT TO	:	AIR, WATER, MINERAL OIL, DIESEL OIL, SALT SPRAY
MONTIERTES KABEL BESTÄNDIG GEGEN:	:	LUFT, WASSER, MINERALÖL, DIESELÖL, SALZSPRÜHNEBEL
CABLE MOUNTED RESISTANT A	:	AIR, EAU, HUILE MINÉRALE, GASOLIL, BROUILLARD SALIN
CAVO MONTATO RESISTENTE A	:	AIR, AQA, OLIO MINERALE, GASOLIO, NEBBIA SALINA


DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) : A : IP 6K 7 / IP 6K 9K
SCHUTZART (IN VERBINDUNG MIT STECKER) : B: IP 6K 6K / IP 6K 9K
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) : C: IP 54
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) : ISO 20653 (en)

CABLE SHEATH: PVC (A)
KABELMANTEL: 3x1.5mm² + 2x4mm² + 2x1mm²
GAINE DU CÂBLE:
GUAINA CAVO:

SURFACE PROTECTION :
OBERFLÄCHENSCHUTZ : * Sn
PROTECTION DE SURFACE:
PROTEZIONE SUPERFICI :

FIELD OF APPLICATION : TRAILER
EINSATZBEREICH : ANHAENGER
DOMAINE D'APPLICATION: REMORQUE
CAMPO DI APPLICAZIONE: RIMORCHIO

Pin	Signal
7	RD
6	BK
4	YE
5	BN
3	WH
2	WH/GN
1	WH/BN

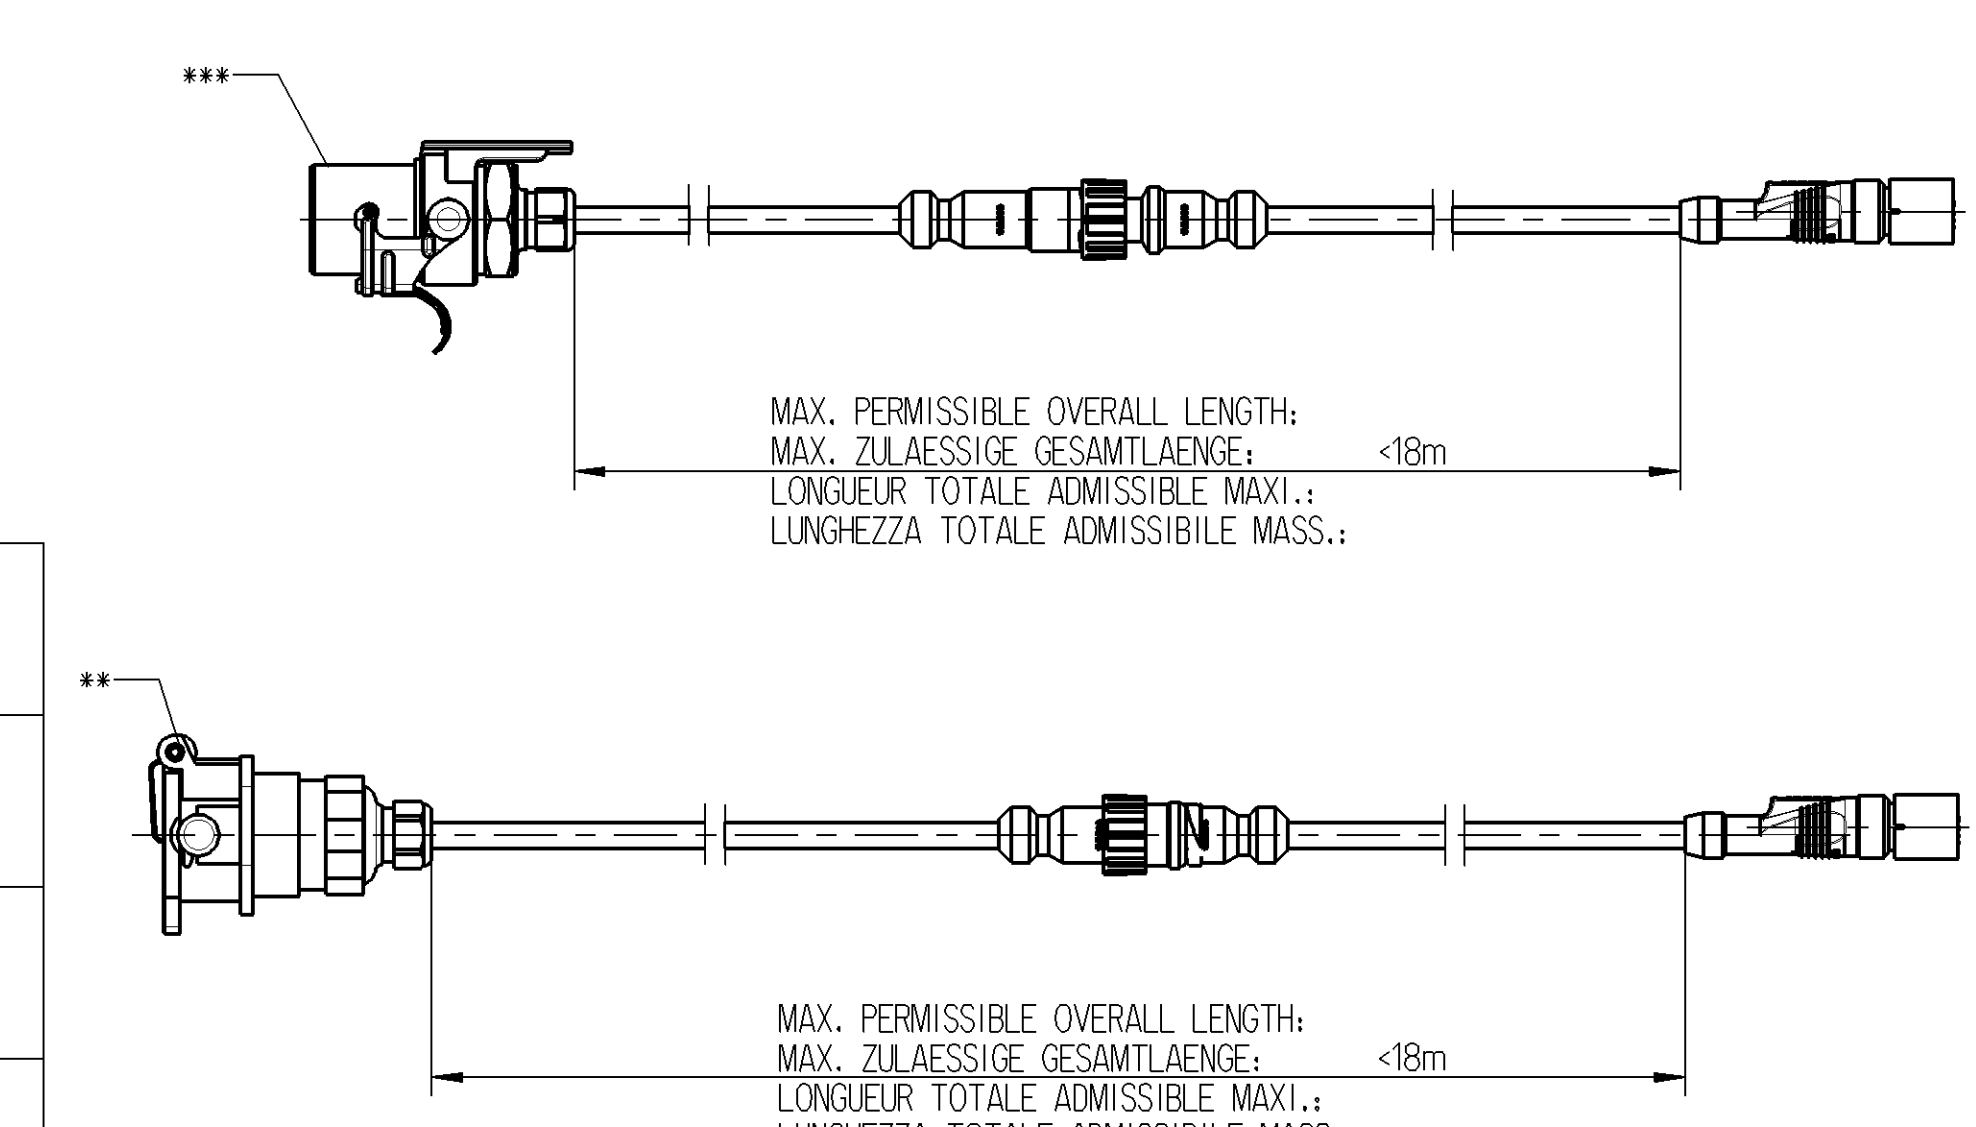

General Specification: JED-334-O						Copyright WABCO®		WABCO									
Further Technical Data:						Date	Signature										
Doc. Code:		Sheet:		To		2010-04-27		Hornischmacher		SUPPLY CABLE VERSORGUNGSLEITUNG CABO D' ALIMENTAZIONE CABO DI ALIMENTAZIONE							
General Tolerances JED-261						2010-04-27		Gruender									
Range of Nominal Dimensions (± mm)						Checked		Drosner									
Class	1)	≤ 50	> 50 ≤ 180	180 ≤ 400	> 400	± 0.3		Drosner									
Fine		0.5	1.0	1.5	2.0												
Medium	X	1.0	2.0	3.0	4.0												
Coarse		2.0	3.5	5.0	6.5												
Tapped Holes acc.						Mass		Scale		Material No.							
1) Tolerance Class Applied Crossmarked						KG		1:1 2:1		449 347 000 0							
						Size		DAD System									
A 1						Pro/E				ECON.No.		Revision		Techn. Ref.		Replacement for	
										152547		1x A		6930.EM		884 057 819 0	