
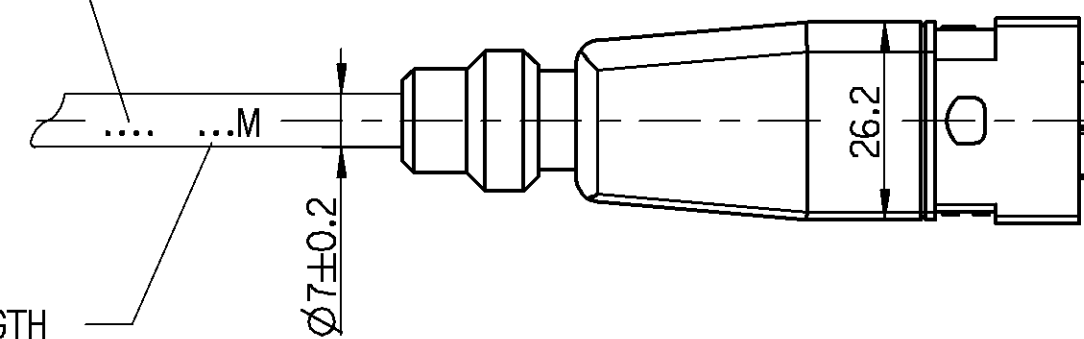
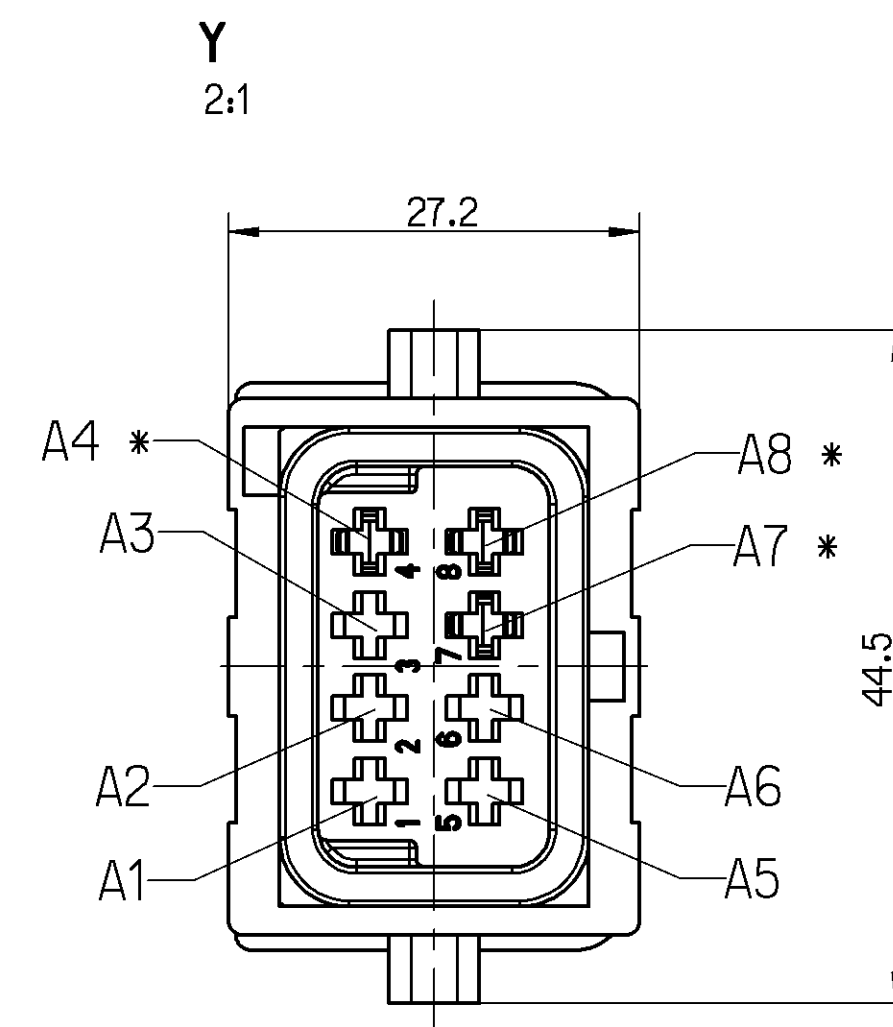
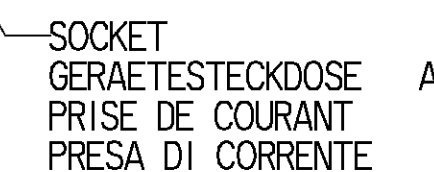





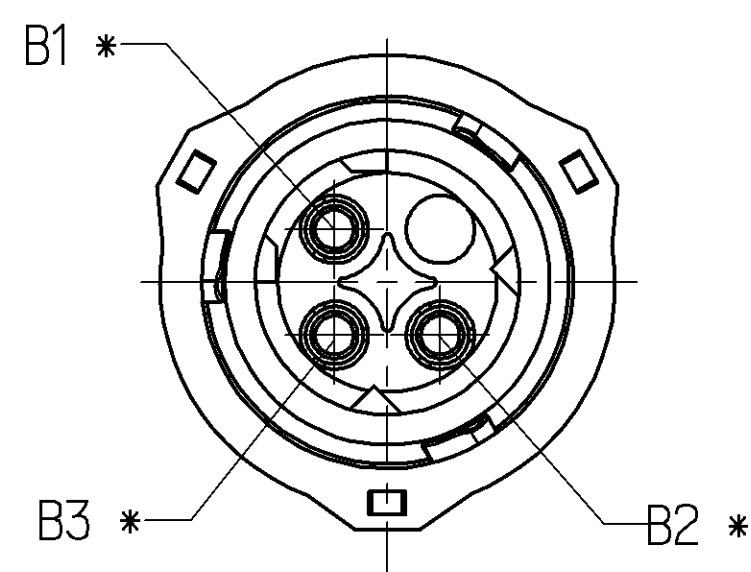

LENGTH 
LAENGE L [m]
LONGEUR
LUNGHEZZA

RESISTANT TO : AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY
BESTÄNDIG GEGEN: LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRÜHNEL
RESISTANT A : AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A : ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

CABLE	PUR
LEITUNG	3 x 1.5mm ²
CABLE	
CAVO	

SURFACE PROTECTION :
OBERFLAECHENSCHUTZ : * Sn
PROTECTION DE SURFACE:
PROTEZIONE SUPERFICI :

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) :
SCHUTZART (IN VERBINDUNG MIT STECKER) : A: IP 6K 9K / IP 67
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) : B: IP 69K
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) :

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	L[m] 449 435 ☐ ☐ ☐ 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = 6m 449 435 060 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L _{min} = 0.1m L _{max} = 20m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L ≤ 10m ±0.050m L > 10m ±0.075m

GENERAL SPECIFICATION: JED-334-0				PRO/ENGINEER DRAWING COPYRIGHT			
FURTHER TECHNICAL DATA:				DATE SIGNATURE			
DOC. CODE:		SHEET: TO		DRAWN		CABLE WITH SOCKET KABEL MIT GERAETESTECKDOSE CABLE AVEC PRISE DE COURANT CAVO CON PRESA DI CORRENTE	
GENERAL TOLERANCES				04-09-10 HARN/SCHM.			
RANGE OF NOMINAL DIMENSIONS (± mm)				CHECKED			
CLASS	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	04-09-10 OVERHAGE	
FINE		0.5	1.0	1.5	2.0	EXPERT CODE	
MEDIUM		1.0	2.0	3.0	4.0	7 7 4	
COARSE		2.0	3.5	5.0	6.5	PRODUCT IDENTIFICATION NO.	
						DOC. CODE	
						SHEET	
TAPPED HOLES ACC. ISO 4039 / JED-152						449 435 000 0	
1) TOLERANCE CLASS APPLIED: AROUND						653	
DON-NO.						1/1	
REV.							
DATE							
A 1						650	
							
FUNCTION CODE						SHAPE CODE	
11						11	
REPLACEMENT FOR							