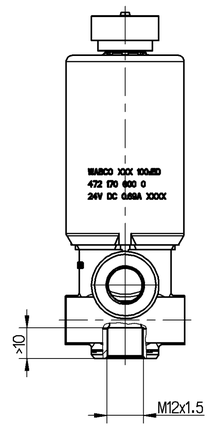

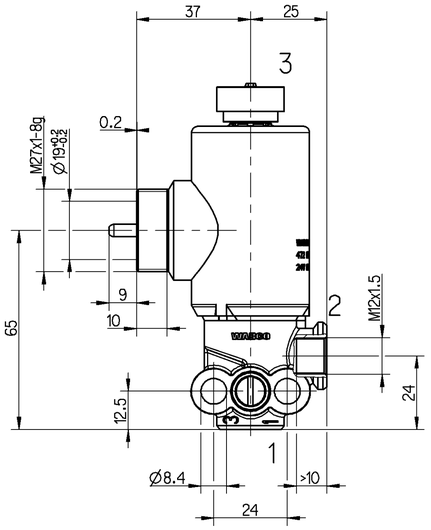

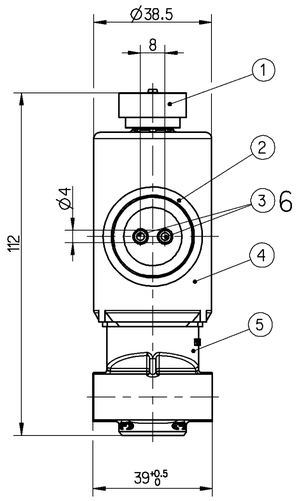

THE VALVE CORRESPONDS TO THE REGULATIONS FOR ELECTROMAGNETIC DEVICES ACCORDING TO DIN VDE 0580
DAS GERAET ENTSPRICHT DEN BESTIMMUNGEN FUER ELEKTROMAGNETISCHE GERAETE NACH DIN VDE 0580
LE VALVE CORRESPOND AUX CONDITIONS POUR DES APPAREILS ELECTROMAGNETIQUES SUIVANT DIN VDE 0580
LA VALVOLA CORRISPONDE ALLE CONDIZIONI PER APPARECCI ELETTROMAGNETICHI SECONDO DIN VDE 0580

MEDIUM : AIR
MEDIUM : LUFT
FLUIDE : AIR
FLUIDO : ARIA

VOLTAGE :
SPANNUNG : $24^{+8}_{-6.0}$ V DC
TENSION :
TENSIONE :

WORKING PRESSURE :
BETRIEBSDRUCK : p_e = 5.5...10.2 bar
PRESSION D'UTILISATION :
PRESSIONE DI ESERCIZIO :

RATED CURRENT :
NENNSTROM : 0.69 A
COURANT NOMINAL :
CORRENTE NOMINALE :

PROTECTION CLASS :
SCHUTZKLASSE : III
CLASSE DE PROTECTION :
CLASSE DI PROTEZIONE :

DUTY RATIO :
RELATIVE EINSCHALTDAUER : 100% ED
FACTEUR DE MARCHE :
FATTORE DI FUNZIONAMENTO :

NOMINAL DIAMETER SUPPLY Ø4mm, EXHAUST Ø4mm
NENNWEITE BELUEFTUNG Ø4mm, ENTLUEFTUNG Ø4mm
DIAMETRE NOMINAL ALIMENTATION Ø4mm, ECCHAPPEMENT Ø4mm
DIAMETRO NOMINALE ALIMENTAZIONE Ø4mm, SCARICO Ø4mm

INSTALLATION POSITION : OPTIONAL
EINBAULAGE : BELIEBIG *
POSITION D' INSTALLATION : AU CHOIX
POSIZIONE DI MONTAGGIO : A PICERE

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH : -40°C...+80°C
GAMME D'APPLICATION THERMIQUE :
CAMPO TERMICO D'APPLICAZIONE :

PERMISSIBLE PRESSURE :
ZULAESSIGER DRUCK : p_e < 13 bar
PRESSION ADMISSIBLE :
PRESSIONE AMMISIBILE :

COIL RESISTANCE :
SPULENWIDERSTAND : $R\vartheta_{20}$ = 35±2Ω
RESISTANCE DE BOBINE :
RESISTENZA DELL'AVVOLGIMENTO :

NOMINAL PERFORMANCE :
NENNLEISTUNG : 16.6 W
PUISSANCE NOMINAL :
POTENZA NOMINALE :

CUT-OUT VOLTAGE PEAKS :
ABSCHALTSPANNUNGSSPITZEN : < 180 V
POINTES DE TENSION A LA RUPTURE :
PICCHI DI TENSIONE D'APERTURA :

DEGREE OF PROTECTION
SCHUTZART
DEGRE DE PROTECTION
GRADO DI PROTEZIONE

IP 6K6 AND IP 6K9K — WITH SEALED CONNECTIONS 1, 2, 6
IP 6K6 UND IP 6K9K — MIT ABGEDICHTETEN ANSCHLUESSEN 1, 2, 6
IP 6K6 ET — AVEC CENNEXTIONS ETANCHEES 1, 2, 6
IP 6K6 E — CON CONNESSIONI SIGILLATI 1, 2, 6

IP 6K7 — WITH SEALED CONNECTIONS 1, 2, 3, 6
IP 6K7 — MIT ABGEDICHTETEN ANSCHLUESSEN 1, 2, 3, 6
IP 6K7 — AVEC CONNEXIONS ETACHES 1, 2, 3, 6
IP 6K7 — CON CONNESSIONI SIGILLATI 1, 2, 3, 6

1 SUPPLY
ENERGIEZUFLUSS VOM VORRAT
ALIMENTATION
ALIMENTAZIONE

2 DELIVERY OF ENERGY
ENERGIEABFLUSS IN DIE ARBEITSLEITUNG
SORTIE D'ENERGIE
PORTATA DI ENERGIA

3 EXHAUST
ANSCHLUSS ATMOSPHAERE
ECHAPPEMENT
SCARICO

6 ELECTRIC TERMAL
ELEKTRISCHER ANSCHLUSS
BORNE ELECTRIQUE
MORSETTI ELETTRICI

* WHEN INSTALLED AS TRACTION CONTROL SYSTEM VALVE
BEI EINBAU ALS ASR VENTIL
LORS DE L'INSTALLATION COMME VALVE POUR DISPOSITIF ANTI-PATINAGE
PER MONTAGGIO COMO VALVOLA PER DISPOSITIVO DI CONTROLLO ANTISLITTAMENTO
Ⓓ (SEE / SIEHE 400 000 500 0 / 435 / VOIR / VEDERE) : ± 30°



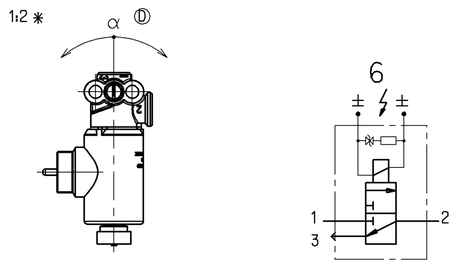

	MATERIAL / SURFACE PROTECTION WERKSTOFF / OBERFLAECHENSCHUTZ MATIERE / PROTECTION DE SURFACE MATERIALE / PROTEZIONE SUPERFICIALE
1	JED-354-1 / -
2	JED-559 / -
3	JED-570-656
4	JED-303 / JED-739-0
5	JED-004-M / JED-260

GENERAL SPECIFICATION: JED-334-0
FURTHER TECHNICAL DATA: 472 170 600 0 Ⓓ
DOC. CODE: 535 SHEET: 1 TO 9

GENERAL TOLERANCES

CLASS 1)	RANGE OF NOMINAL DIMENSIONS (± mm) ≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400
FINE	0.5	1.0	1.5	2.0
MEDIUM	1.0	2.0	3.0	4.0
COARSE	2.0	3.5	5.0	6.5

±3°

TAPPED HOLES ACC. ISO 4039 / JED-152
1) TOLERANCE CLASS APPLIED CROSSMARKED

076250	4xD	01-03-01
DCN-NO.	REV.	DATE

Pro/ENGINEER DRAWING COPYRIGHT
DATE | SIGNATURE
DRAWN: 01-03-01 Runge
CHECKED: 01-03-01 Rovira
EXPERT CODE: 7 2 6

WABCO

3/2 SOLENOID VALVE
3/2 MAGNETVENTIL
ELECTROVANNE 3/2
ELETTROVALVOLA 3/2

MASS: ~0.5 KG | SCALE: 1:1
PRODUCT IDENTIFICATION NO.: 472 170 600 0
DOC. CODE: 605 | SHEET: 1/1
SIZE: A 1 | TRI: 142
FUNCTION CODE | SHAPE CODE | PRODUCT TYPE: 9 2 | REPLACEMENT FOR: 472 170 600 0 of 96-03-19

Ⓓ

TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION OU COMMUNICATION DE SON CONTENU NE SONT PAS AUTORISEES SAUF AUTORISATION EXPRESSE. TOUS DROITS RESERVES EN CAS DE DEPOT DE BREVET.
NOR IS PERMISSION GRANTED FOR ANY USE OR COMMUNICATION OF THE CONTENTS HEREOF WITHOUT EXPRESS AUTHORITY. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN.
NON È PERMESSO COMUNICARE O RIPRODURRE QUESTO DOCUMENTO, NE UTILIZZARNE IL CONTENUTO O RENDERLO DISPONIBILE A TERZI, SENZA NOSTRA ESPRESSA AUTORIZZAZIONE. TUTTI I DIRITTI SONO RISERVATI IN CASO DI CONCESSIONE DI BREVETTO O DI REGISTRAZIONE DI UN MODELLO DI UTILITÀ O DI DISEGNO.
CE DOCUMENT, SON UTILISATION OU SA COMMUNICATION SANS AUTORISATION EXPRESSE SONT INTERDITES. TOUS DROITS RESERVES EN CAS DE DELIVRANCE D'UN BREVET D'UN MODELE D'UTILITE OU D'UN DESSIN OU MODELE.
ESTE DOCUMENTO NO SE PUEDE COPIAR NI ENTREGAR A TERCEROS SIN NUESTRA AUTORIZACION EXPRESA. TODOS LOS DERECHOS RESERVADOS PARA EL CASO DE CONCESION DE PATENTE O DE MODELO DE UTILIDAD.

DWG. 472170600__A02 Dxf: 472170600__605